


PolyWhey®

SUPREME

Ultra-Matte Floor Finish

The new standard in matte wood floor finishes

- A single-component flat matte topcoat that delivers a premium natural raw wood appearance.
- Safe, durable, and easy to apply. Made with PolyWhey® and Climate Cool plant-based resins.
- Unlike other wood floor finishes, it meets the highest professional application and environmental standards, without compromising performance and durability. Supreme creates an invisible smooth surface preserving and protecting the pure beauty of the wood.

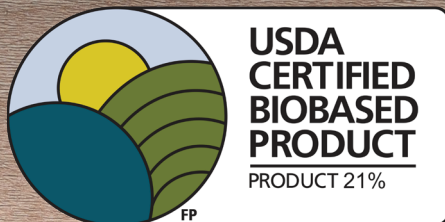

VERMONT NATURAL COATINGS, INC
TEL: 802.472.8700
TOLL FREE: 888.639.9439
info@vermontnaturalcoatings.com
vermontnaturalcoatings.com
© Vermont Natural Coatings, 2021

Visit www.vermontnaturalcoatings.com
for videos, instructions, technical data, safety information,
case studies, and more.

PolyWhey® is a registered trademark of Vermont Natural Coatings, Inc.

VERMONT
NATURAL
COATINGS®

PolyWhey[®] SUPREME Ultra-Matte Professional Wood Floor Finish

FEATURES & BENEFITS

- Single-Component formulation means no wasted finish
- Superior flow and leveling results in easy application and evenly finished floors
- At 225 g/L, PolyWhey Supreme complies with all US and Canadian VOC regulations
- Fast drying time offers the ability to apply up to 3 coats in one day.
- Neutral odor allows for coating in occupied areas without disrupting residents/visitors
- With no carcinogens or isocyanates, PolyWhey Supreme has no flash point and will not contribute toward cancer or fire risks. Supreme is a USDA Certified Biobased Product.

AVAILABILITY


UPC-A	DESCRIPTION	QTY/PK	PKS/CS	CASE WT. (LBS.)	CASE DIMENSIONS
Vermont Natural Coatings Supreme					
817511 01893 2	Finish - 1 Gallon	1	4	38	11" x 14.5" x 10"
817511 01892 5	Finish - 1 Gal. CASE	1 CASE	n/a	38	11" x 14.5" x 10"
817511 01894 9	Finish - 5 Gallon	1	n/a	45	15" x 12" x 12"

VALUE

SAFETY AND VALUE	Characteristic	PolyWhey SUPREME
	VOC in grams per liter	225
	Whey Technology	Yes
	Contains mutagen NMP	No
	Renewable content	Yes
	Coverage	500-600

TECHNICAL DATA

<i>Color in Container</i>	White
<i>Clarity (Dry)</i>	Crystal Clear
<i>Chemical Resistance</i>	No visual defects
<i>VOC</i>	Coating: ≤225g/L (wet) Material: ≤18g/L (dry)
<i>Flash Point</i>	None
<i>Freeze/Thaw Stability</i>	Do not freeze
<i>Pot Life</i>	12 months
<i>Dry Time</i>	1-2 hours (normal conditions)
<i>Clean Up</i>	Soap and hot water
<i>Odor</i>	Slight odor
<i>Maximum Cure</i>	One week
<i>Coverage</i>	500-600 sq. ft. per gallon

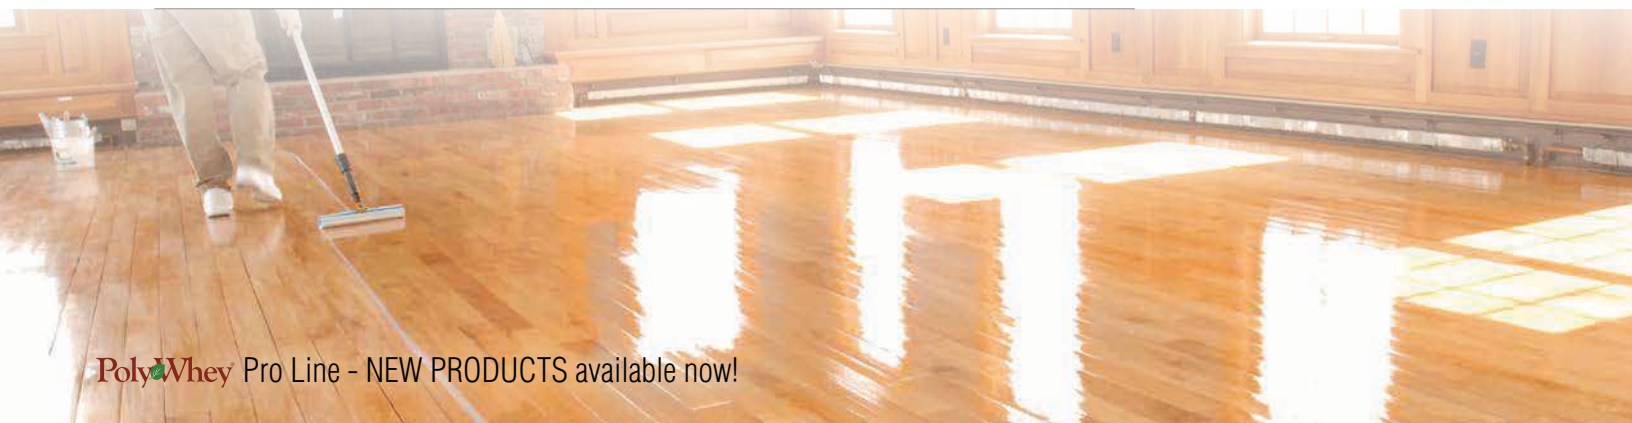

PolyWhey Pro Line - NEW PRODUCTS available now!

VERMONT NATURAL COATINGS, INC
 TEL: 802.472.8700
 TOLL FREE: 888.639.9439
 info@vermontnaturalcoatings.com
 vermontnaturalcoatings.com
 © Vermont Natural Coatings, 2021

Visit www.vermontnaturalcoatings.com
 for videos, instructions, technical data, safety information,
 case studies, and more.

PolyWhey® is a registered trademark of Vermont Natural Coatings, Inc.

VERMONT
 NATURAL
 COATINGS[®]